



DS134RS-230

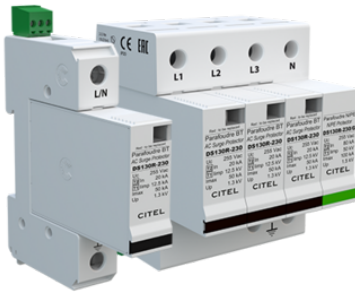

- Type 1 + 2 AC multipolar surge protector
- In : 20 kA
- Iimp total : 50 kA
- Pluggable module for each phase
- Remote signaling
- EN 61643-11, IEC 61643-11 compliance

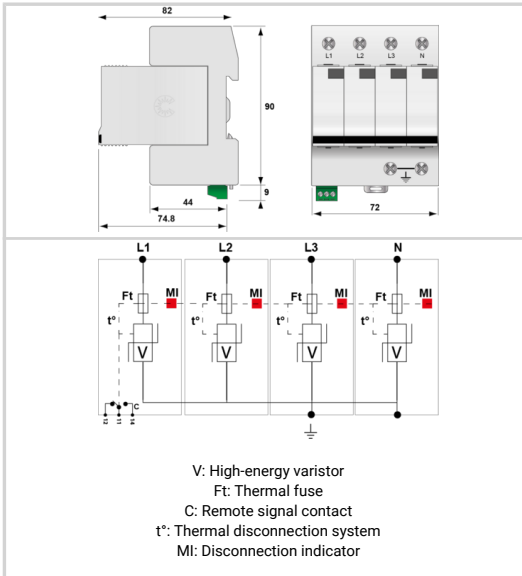

| Electrical Characteristics | |
|--|--|
| SPD type | 1+2 |
| Network | 230/400 V 3-phase+N |
| AC system | TNS |
| Nominal line voltage | Un 230 Vac |
| Max. AC operating voltage | Uc 255 Vac |
| Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection | UT 335 Vac withstand |
| Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection | UT 440 Vac disconnection |
| Follow current | If None |
| Nominal discharge current 15 x 8/20 μs impulses | In 20 kA |
| Max. discharge current max. withstand @ 8/20 μs by pole | Imax 50 kA |
| Impulse current by pole max. withstand 10/350μs by pole | Iimp 12.5 kA |
| Total lightning currentmax. total withstand @ 10/350μs | Itotal 50 kA |
| Withstand on overvoltages IEEE C62.41.1 | 20 kV |
| Specific energy by pole max. withstand 10/350 μs | W/R 40 kJ/ohm |
| Connection mode(s) | L/PE and N/PE |
| Protection mode(s) | Common mode/Differential mode |
| Protection level N/PE @ In (8/20μs) | Up N/PE 1.3 kV |
| Protection level L/PE @ In (8/20μs) | Up L/PE 1.3 kV |
| Admissible short-circuit current | Iscrc 25 000 A |
| Mechanical Characteristics | |
| Technology | MOV |
| SPD configuration | 3-phase+Neutral |
| Connection to Network | By screw terminals: 2.5-25mm ² / by bus |
| Format | Plug-in modular box |
| Mounting | Symmetrical rail 35 mm (EN 60715) |
| Housing material | Thermoplastic UL94 V-0 |
| Operating temperature | Tu -40/+85°C |
| Protection rating | IP20 |
| Failsafe mode | Disconnection from AC network |
| Disconnection indicator | 1 mechanical indicator by pole |
| Spare module(s) | DSM130R-230 |
| Remote signaling of disconnection | Output on changeover contact |
| Dimensions | See diagram |
| Weight | 0.558 kg |
| Disconnectors | |
| Thermal disconnector | Internal |
| Installation ground fault breaker | Type 'S' or delayed |
| Fuses | Fuses Type gG - 125 A |
| Standards | |
| Standards compliance | IEC 61643-11 / EN 61643-11 / UL1449 ed.5 |
| Certification | |
| Part number | |
| 571514 | |