


### DS73RS-600



- Re-inforced Type 2 AC Multipolar surge protector
- In: 30 kA
- I<sub>max</sub> total: 210 kA
- Pluggable module by phase
- Remote signaling
- IEC 61643-11, EN 61643-11 compliance
- UL1449 ed.5 approved

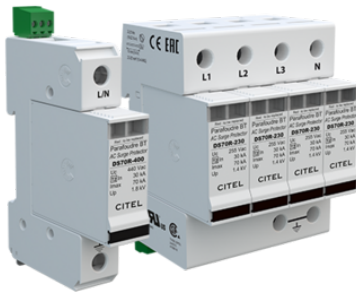

Electrical Characteristics	
SPD type	2
Network	480/690 V Triphasé+N (Delta)
AC system	TNC
Nominal line voltage	U <sub>n</sub> 480 Vac
Max. AC operating voltage	U <sub>c</sub> 840 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT 700 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT 920 Vac disconnection
Follow current	I <sub>f</sub> None
Nominal discharge current 15 x 8/20 µs impulses	I <sub>n</sub> 30 kA
Max. discharge current max. withstand @ 8/20 µs by pole	I <sub>max</sub> 70 kA
Total Maximum discharge current max. total withstand @ 8/20 µs	I <sub>max</sub> Total 210 kA
Connection mode(s)	L/PE
Protection mode(s)	Common mode/Differential mode
Protection level L/PE @ In (8/20µs)	Up L/PE 1.8 kV
Admissible short-circuit current	I <sub>sc</sub> 25 000 A
Mechanical Characteristics	
Technology	MOV
SPD configuration	3-phase+Neutral
Connection to Network	By screw terminals: 2.5-25mm <sup>2</sup> / by bus
Format	Plug-in modular box
Mounting	Symmetrical rail 35 mm (EN 60715)
Housing material	Thermoplastic UL94 V-0
Operating temperature	T <sub>u</sub> -40/+85°C
Protection rating	IP20
Failsafe mode	Disconnection from AC network
Disconnection indicator	2 mechanical indicators by pole
Spare module(s)	DSM70R-600
Remote signaling of disconnection	Output on changeover contact
Dimensions	See diagram
Disconnectors	
Thermal disconnector	Internal
Installation ground fault breaker	Type 'S' or delayed
Fuses	100 A min. - 125 A max. - Fuses type gG
Standards	
Standards compliance	IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification	UL Recognized
Part number	
321523	