



### DS74RS-230/G

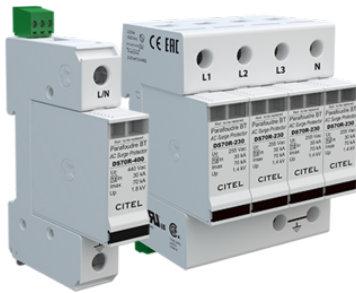

- Re-inforced Type 2 AC surge protector
- In : 30 kA
- I<sub>max</sub> : 70 kA
- Pluggable module by phase
- Remote signaling
- IEC 61643-11, EN 61643-11 compliance
- UL1449 ed.5 approved

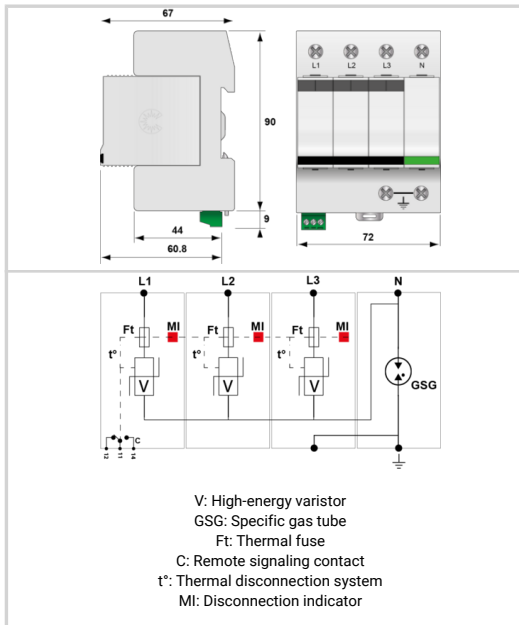

Electrical Characteristics	
SPD type	2
Network	230/400 V 3-phase+N
AC system	TT-TNS
Nominal line voltage	U <sub>n</sub> 230 Vac
Max. AC operating voltage	U <sub>c</sub> 255 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT 335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT 440 Vac disconnection
Temporary Over Voltage N/PE (TOV HT) Without disconnection or with safety disconnection	UT 1200 V/300A/200 ms withstand
Residual Current Leakage current to Ground	I <sub>pe</sub> None
Follow current	I <sub>f</sub> None
Nominal discharge current 15 x 8/20 μs impulses	I <sub>n</sub> 30 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I <sub>max</sub> 70 kA
Total Maximum discharge current max. total withstand @ 8/20 μs	I <sub>max</sub> Total 70 kA
Connection mode(s)	L/N and N/PE
Protection mode(s)	Common/Differential mode
Residual voltage at 5 kA @ 8/20μs	Up-5kA 0.9 kV
Protection level L/N @ In (8/20μs)	Up L/N 1.4 kV
Protection level N/PE @ In (8/20μs)	Up N/PE 1.5 kV
Admissible short-circuit current	I <sub>sc</sub> 25 000 A
Mechanical Characteristics	
Technology	MOV
SPD configuration	3-phase+Neutral
Connection to Network	By screw terminals: 2.5-25mm <sup>2</sup> / by bus
Format	Plug-in modular box
Mounting	Symmetrical rail 35 mm (EN 60715)
Housing material	Thermoplastic UL94 V-2
Operating temperature	T <sub>u</sub> -40/+85°C
Protection rating	IP20
Failsafe mode	Disconnection from AC network
Disconnection indicator	2 mechanical indicators by pole
Spare module(s)	DSM70R-230 + DSM70G-600
Remote signaling of disconnection	Output on changeover contact
Dimensions	See diagram
Disconnectors	
Thermal disconnector	Internal
Installation ground fault breaker	Type 'S' or delayed
Fuses	100 A min. - 125 A max. - Fuses type gG
Standards	
Standards compliance	IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification	UL Recognized
Part number	
491532	